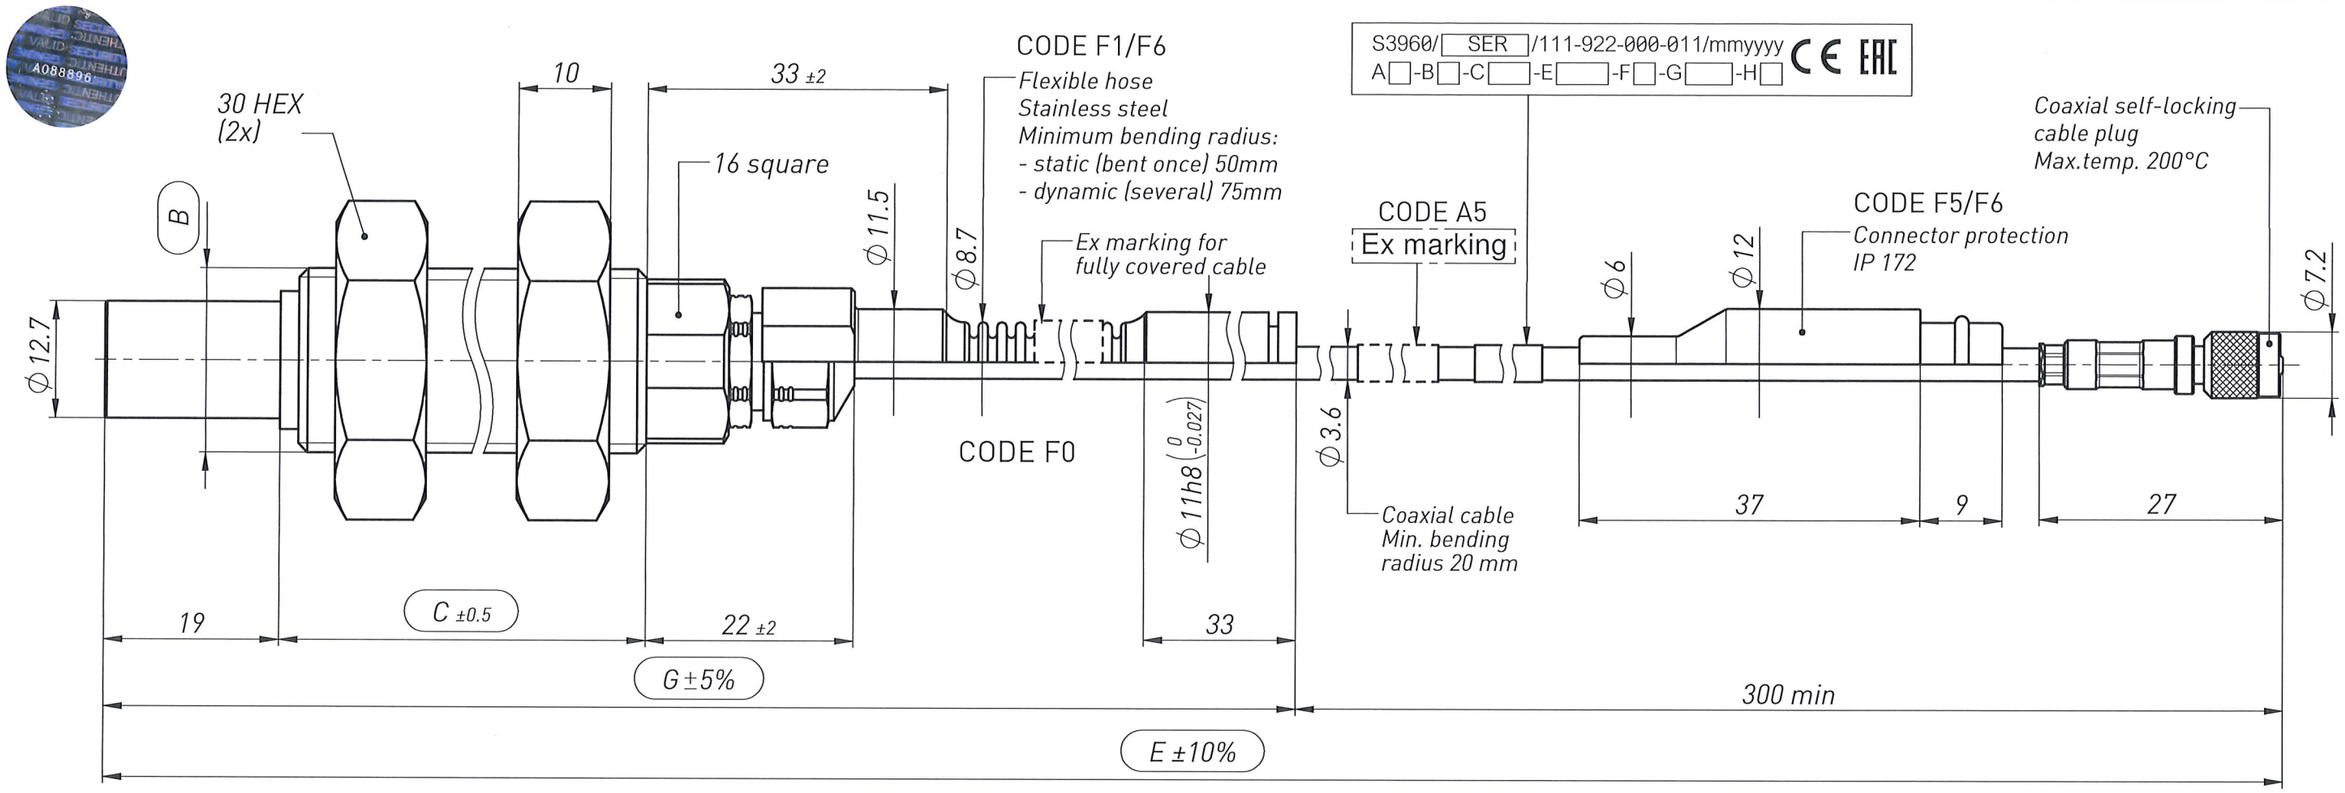

ORDERING NUMBER: 111-922-000-011- A-B-C-E-F-G-H

ENVIRONMENT	A
Standard	1
Explosive (Ex)	5

BODY THREAD	B
M20x1.5	1

BODY LENGTH [mm]	C
42	42
72	72
92	92
120	120
150	150
180	180

INTEGRAL CABLE LENGTH [mm]	E
1000±100	1000
5000±500	5000
10000±1000	10000

PROTECTIONS		F
CABLE	CONNECTOR	
None	None	0
Flexible hose	None	1
None	IP 172	5
Flexible hose	IP 172	6

FLEXIBLE HOSE [mm]	G
Each 100 mm min. C+100; max. E-300	
None	0
Min. 200	200
Max. 9700	9700

TOTAL SYSTEM LENGTH	H
1m	01
5m	05
10m	10

CODE F1/F6

PLASTIC BAG

(1:2)



RoHS

DIRECTIVE 2011/65/UE

NO MODIFICATION ALLOWED
WITHOUT PRIOR AUTHORIZATION
OF Ex MANAGER

NO MODIFICATION ALLOWED
WITHOUT PRIOR AUTHORIZATION OF
SIL FUNCTIONAL SAFETY MANAGER

Rev.	Date	Change N°	Drawn	Appr.	Description
1	08.04.22	20064	C.Roulin	F.Micco	16 square was 17 square. Ex labelling added on flexible hose

INFORMATION CONTAINED IN THIS DOCUMENT MAY BE SUBJECT TO EXPORT CONTROL REGULATIONS OF THE EUROPEAN UNION, USA OR OTHER COUNTRIES. EACH RECIPIENT OF THIS DOCUMENT IS RESPONSIBLE FOR ENSURING THAT TRANSFER OR USE OF ANY INFORMATION CONTAINED IN THIS DOCUMENT COMPLIES WITH ALL RELEVANT EXPORT CONTROL REGULATIONS. ECN NO. N/A
THIS DRAWING AND/OR ITS DESIGN IS PROPRIETARY AND THE PROPERTY OF MEGGITT SA. THIS DRAWING AND/OR ITS DESIGN IS PROVIDED TO YOU SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY. IT SHALL NOT BE USED TO FURNISH ANY INFORMATION FOR THE MAKING OF DRAWINGS, PRINTS OR APPARATUS, OR PARTS THEREFORE, EXCEPT WHERE OTHERWISE EXPRESSLY PROVIDED FOR BY CONTRACT WITH MEGGITT SA.
© MEGGITT SA 2021. ALL RIGHTS RESERVED. NO PART OF THIS PUBLICATION MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPIED OR IN ANY OTHER MANNER WITHOUT THE PRIOR WRITTEN PERMISSION OF MEGGITT SA.

MFR S3960 | MSS-CAD | Scale 3:2 | Format A3

MEGGITT

Meggitt SA
Rte de Moncor 4, CH-1752 Villars-sur-Glâne, Switzerland

Material: | Repl.by: | Repl.for:

Linear Tolerances [mm]								Radius / Chamfers [mm]			Tol. on angle [°] (L [mm])			
› 0,5 ... 3	› 3 ... 6	› 6 ... 30	› 30 ... 120	› 120 ... 400	›400 ...1000	›1000 ...2000	›2000 ...4000	› 0,5 ... 3	› 3 ... 6	› 6	... 10	› 10 ... 50	› 50 ... 120	› 120 ... 400
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Drawn	16.11.21	N.Mancini
Check.	16..11.21	I.Mauconduit
Appr.	16.11.21	F.Micco

PROXIMITY TRANSDUCER TYPE TQ922

PNR 111-922-000-011

DWG.N°

111-922-000 V 011