

**RoHS**
DIRECTIVE 2011/65/UE20.10.15 *Mic*NO MODIFICATION ALLOWED
WITHOUT PRIOR AUTHORIZATION
OF MANAGER

SENSITIVITY: 5µA/g ±5%

2	19.10.15	15420	A. Schafer	<i>ch</i>	Marking: Addition of MEGGITT SA and CSA-Certification.
1	08.04.15	15167	A. Schafer	C. Roulin	Temperature: Zone A and B: -55°C was -54°C, Zone C: -40°C to +125°C was -54°C to +100°C; Dimensions 30: ± 0.2 was ± 0.5; Dimension 30.5: ± 0.5 was ± 1 !
Rev.	Date	PM	Drawn	Appr.	Description

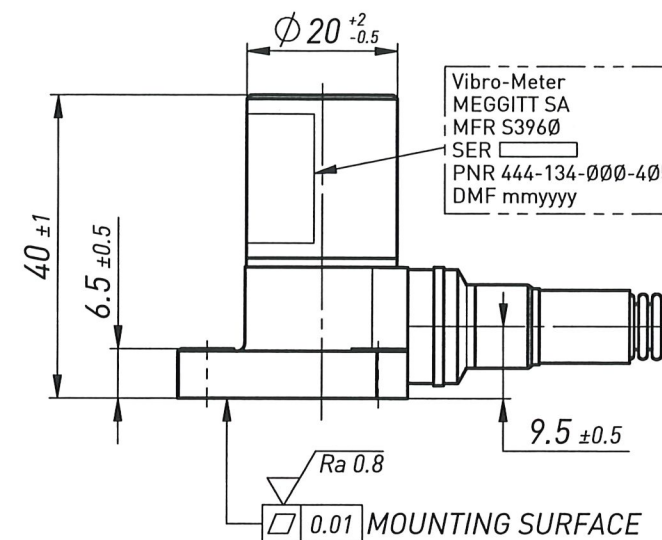
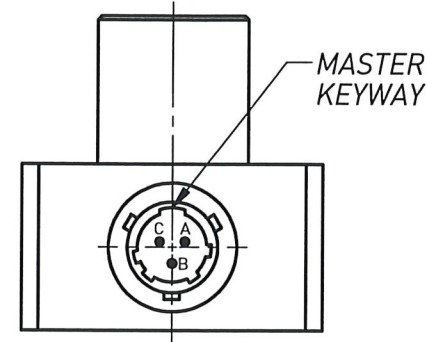
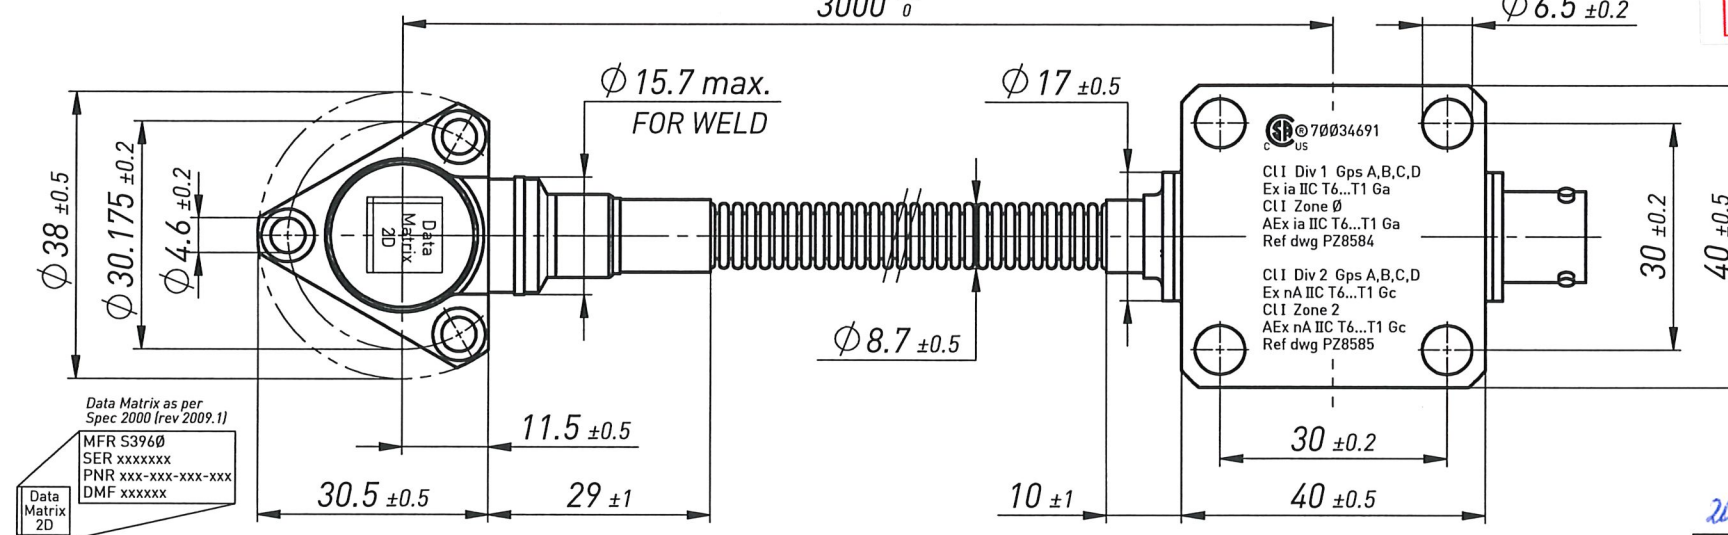
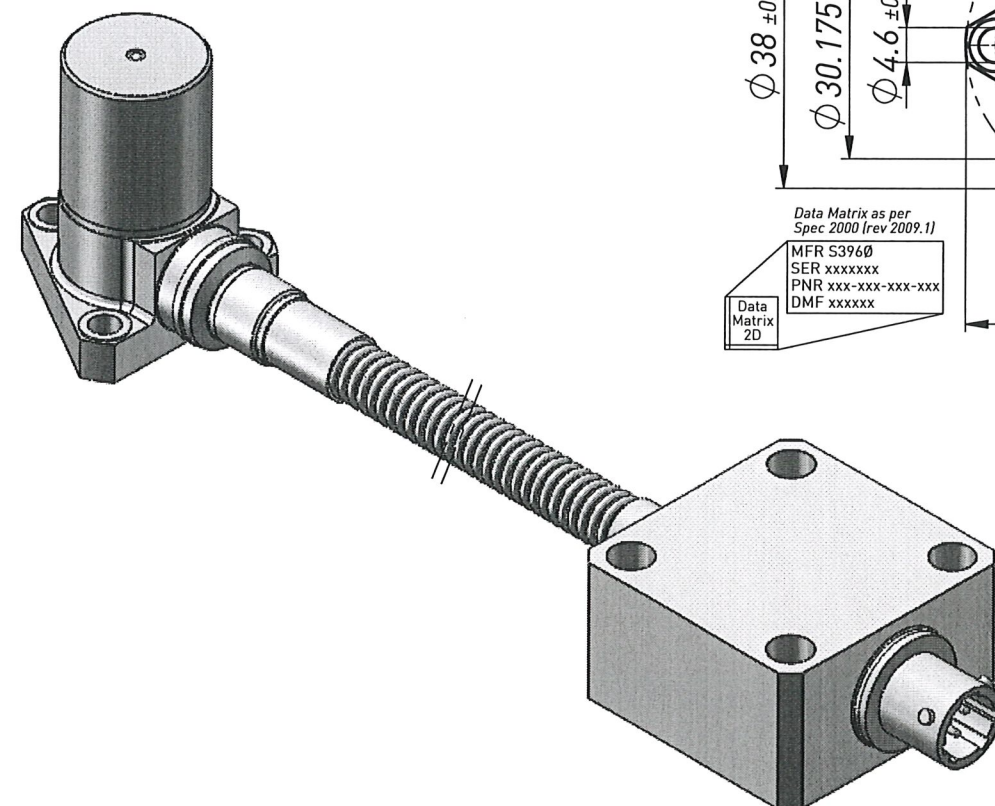
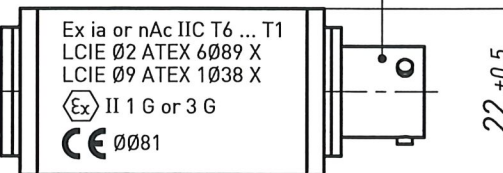
INFORMATION CONTAINED IN THIS DOCUMENT MAY BE SUBJECT TO EXPORT CONTROL REGULATIONS OF THE EUROPEAN UNION, USA OR OTHER COUNTRIES. EACH RECIPIENT OF THIS DOCUMENT IS RESPONSIBLE FOR ENSURING THAT TRANSFER OR USE OF ANY INFORMATION CONTAINED IN THIS DOCUMENT COMPLIES WITH ALL RELEVANT EXPORT CONTROL REGULATIONS. ECN NO. N/A

THIS DRAWING AND/OR ITS DESIGN IS PROPRIETARY AND THE PROPERTY OF MEGGITT SA. THIS DRAWING AND/OR ITS DESIGN IS PROVIDED TO YOU SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY. IT SHALL NOT BE USED TO FURNISH ANY INFORMATION FOR THE MAKING OF DRAWINGS, PRINTS OR APPARATUS, OR PARTS THEREFORE, EXCEPT WHERE OTHERWISE EXPRESSLY PROVIDED FOR BY CONTRACT WITH MEGGITT SA.

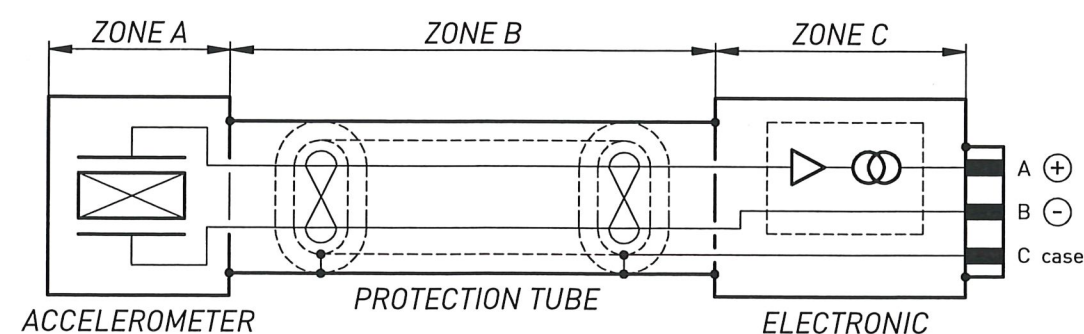
© MEGGITT SA 2015. ALL RIGHTS RESERVED. NO PART OF THIS PUBLICATION MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPIED OR IN ANY OTHER MANNER WITHOUT THE PRIOR WRITTEN PERMISSION OF MEGGITT SA.

MFR S3960	MSS-CAD 	MEGGITT Rte de Moncor 4, CH-1752 Villars-sur-Glâne, Meggitt SA Switzerland														
Scale 1:1	Format A3															
Material: INCONEL 600 / STAINLESS STEEL								Repl.by:				Repl.for:				
Linear Tolerances [mm]								Radius / Chamfers [mm]			Tol. on angle [°] 			Drawn	06.03.2015	A.Schafer
> 0,5 ... 3	> 3 ... 6	> 6 ... 30	> 30 ... 120	> 120 ... 400	> 400 ... 1000	> 1000 ... 2000	> 2000 ... 4000	> 0,5 ... 3	> 3 ... 6	> 6 ... 10	> 10 ... 50	> 50 ... 120	> 120 ... 400	Checked	10.03.2015	C.Roulin
-	-	-	-	-	-	-	-	-	-	-	-	-	-	Appr.	10.03.2015	F.Micco

Accelerometer Type CE 134	DWG.N° 444-134-000 D 405
PNR 444-134-000-405	

DIRECTION OF ACCELERATION
TO PROVIDE A POSITIVE SIGNALFLEXIBLE LEAKTIGHT
PROTECTION TUBECONNECTOR
BASED ON
MS3112E8-3P

WIRING DIAGRAM

TEMPERATURE:
ZONE A: -55°C to +350°C
ZONE B: -55°C to +260°C
ZONE C: -40°C to +125°CNOTE:
PINS B AND C TO BE
CONNECTED TOGETHER
EXTERNALLY