



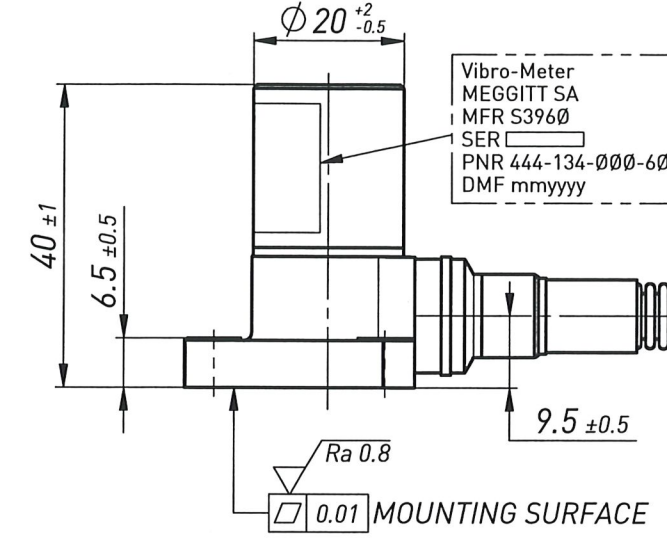



RoHS
DIRECTIVE 2011/65/UE

DIRECTION OF ACCELERATION
TO PROVIDE A POSITIVE SIGNAL

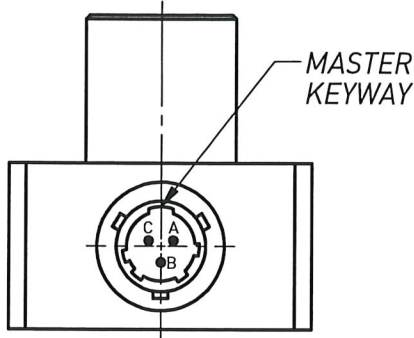

FLEXIBLE LEAKTIGHT
PROTECTION TUBE

CONNECTOR
BASED ON
MS3112E8-3P

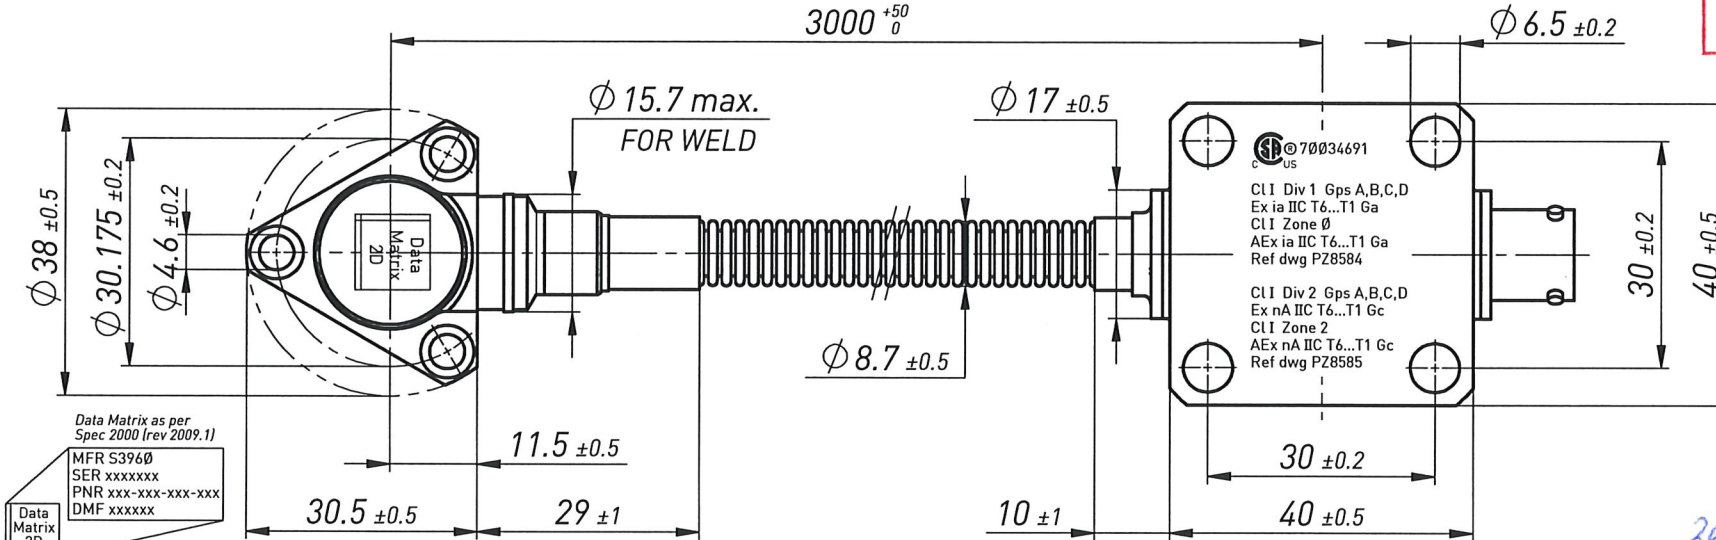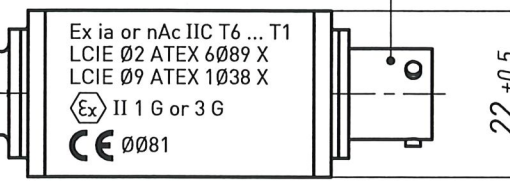

Data Matrix as per
Spec 2000 (rev 2009.1)
MFR S3960
SER xxxxxxx
PNR xxx-xxx-xxx-xxx
DMF xxxxxxx

20.10.15
**NO MODIFICATION ALLOWED
WITHOUT PRIOR AUTHORIZATION
OF MANAGER**

SENSITIVITY: 5µA/g ±5%

2	20.10.15	15420	A. Schafer		Marking: Addition of MEGGITT SA and CSA-Certification.
1	08.04.15	15167	A. Schafer	C. Roulin	Temperature: Zone A and B: -55°C was -54°C, Zone C: -40°C to +125°C was -54°C to +100°C; Dimensions 30: ±0.2 was ±0.5; Dimension 30.5: ±0.5 was ±1 !
Rev.	Date	PM	Drawn	Appr.	Description

INFORMATION CONTAINED IN THIS DOCUMENT MAY BE SUBJECT TO EXPORT CONTROL REGULATIONS OF THE EUROPEAN UNION, USA OR OTHER COUNTRIES. EACH RECIPIENT OF THIS DOCUMENT IS RESPONSIBLE FOR ENSURING THAT TRANSFER OR USE OF ANY INFORMATION CONTAINED IN THIS DOCUMENT COMPLIES WITH ALL RELEVANT EXPORT CONTROL REGULATIONS. ECN NO. N/A
THIS DRAWING AND/OR ITS DESIGN IS PROPRIETARY AND THE PROPERTY OF MEGGITT SA. THIS DRAWING AND/OR ITS DESIGN IS PROVIDED TO YOU SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY. IT SHALL NOT BE USED TO FURNISH ANY INFORMATION FOR THE MAKING OF DRAWINGS, PRINTS OR APPARATUS, OR PARTS THEREFORE, EXCEPT WHERE OTHERWISE EXPRESSLY PROVIDED FOR BY CONTRACT WITH MEGGITT SA.
© MEGGITT SA 2015. ALL RIGHTS RESERVED. NO PART OF THIS PUBLICATION MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPIED OR IN ANY OTHER MANNER WITHOUT THE PRIOR WRITTEN PERMISSION OF MEGGITT SA.

MFR S3960

MSS-CAD

Scale 1:1

Format A3

Material: INCONEL 600 / STAINLESS STEEL

Repl.by:

Repl.for:

Linear Tolerances [mm]	Radius / Chamfers [mm]	Tol. on angle [°]
>0.5 ...3	>3 ...6	>6 ...10
>6 ...30	>30 ...120	>120 ...400
>30 ...120	>120 ...400	>400 ...1000
>120 ...400	>400 ...1000	>1000 ...2000
>400 ...1000	>1000 ...2000	>2000 ...4000

Accelerometer Type CE 134

PNR 444-134-000-605

Meggitt SA

Rte de Moncor 4, CH-1752 Villars-sur-Glâne, Switzerland

Drawn 06.03.2015 A.Schafer


Checked 10.03.2015 C.Roulin

Appr. 10.03.2015 F.Micco

DWG.N°

444-134-000 D 605

WIRING DIAGRAM

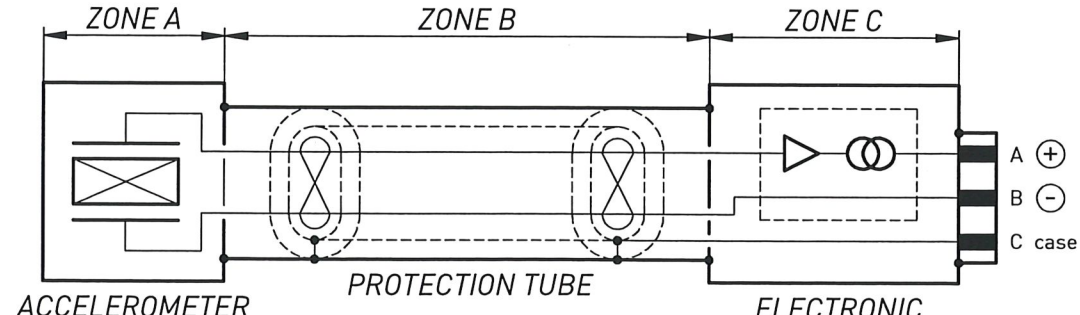

TEMPERATURE:
ZONE A: -55°C to +350°C
ZONE B: -55°C to +260°C
ZONE C: -40°C to +125°C

NOTE:
PINS B AND C TO BE
CONNECTED TOGETHER
EXTERNALLY