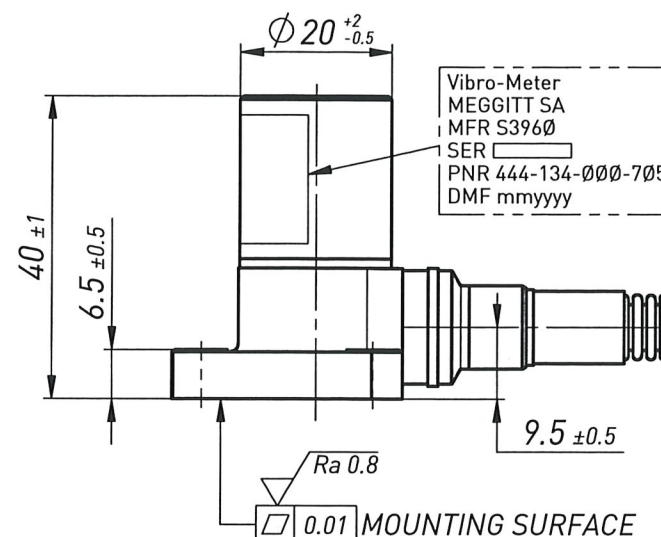
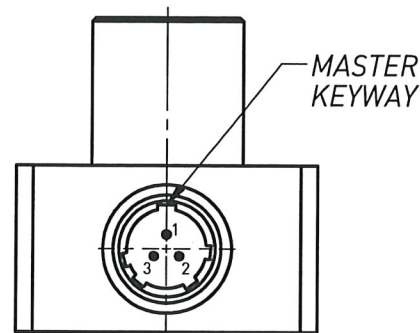
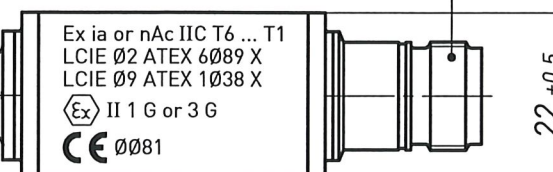

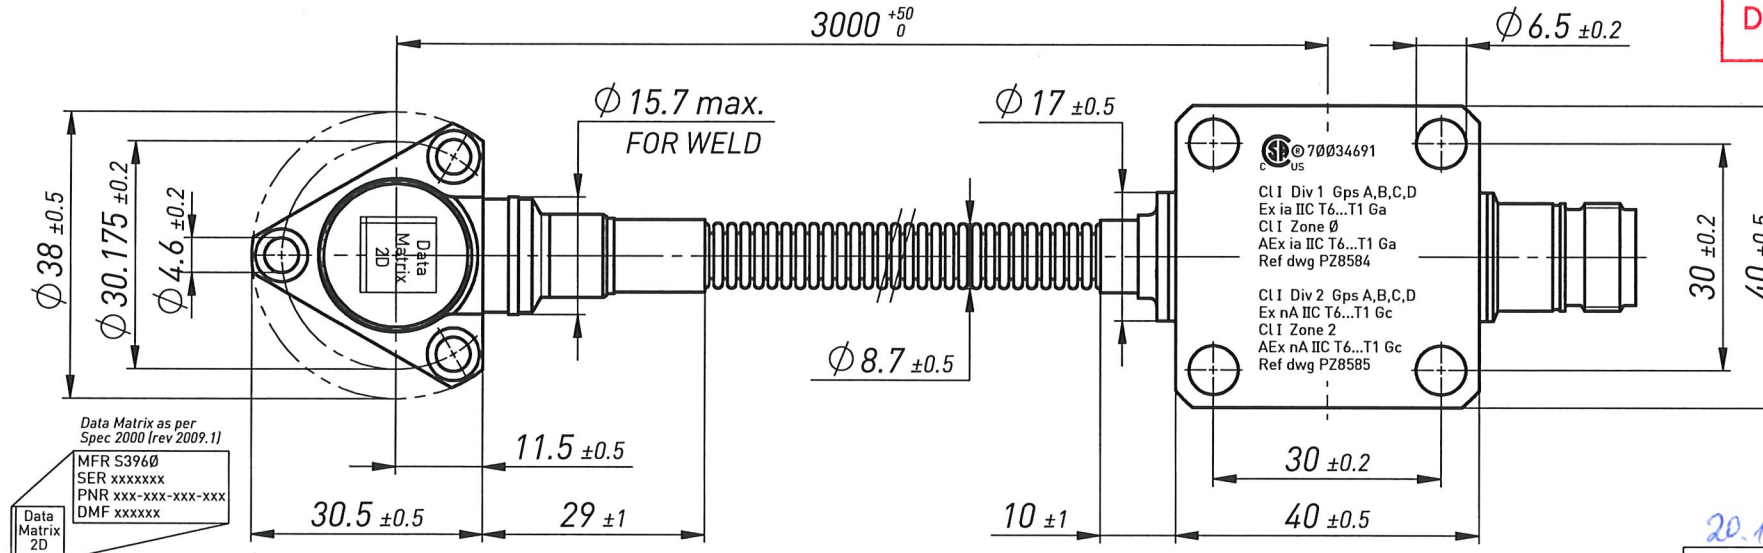
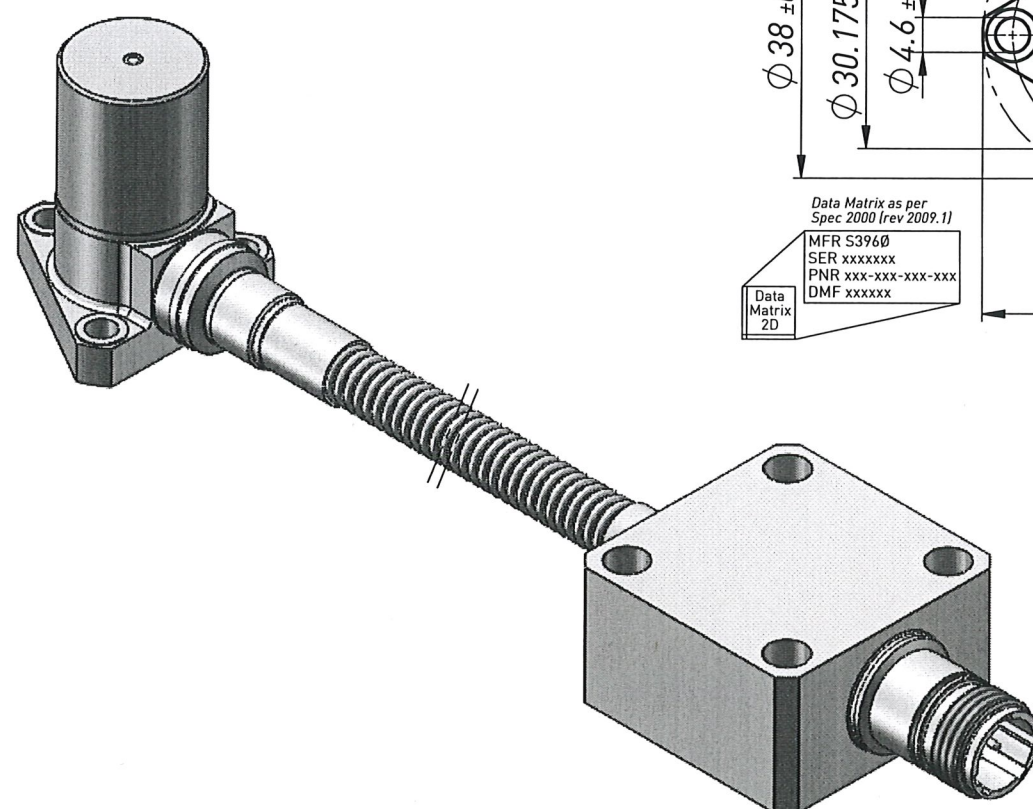


A

B

C

D

MEGGITT REF.DOC.: DSS 1151-03
ATP 1860-01DIRECTION OF ACCELERATION
TO PROVIDE A POSITIVE SIGNALFLEXIBLE LEAKTIGHT
PROTECTION TUBECONNECTOR
BASED ON
EN2997Y10803MNRoHS
DIRECTIVE 2011/65/UE

20.10.15 Merin

NO MODIFICATION ALLOWED
WITHOUT PRIOR AUTHORIZATION
OF MANAGER

SENSITIVITY: 5µA/g ±5%

2	20.10.15	15420	A. Schafer		Marking: Addition of MEGGITT SA and CSA-Certification.
1	08.04.15	15167	A. Schafer	C. Roulin	Temperature: Zone A and B: -55°C to +350°C, Zone C: -40°C to +125°C was -54°C to +100°C; Dimensions 30: ±0.2 was ±0.5; Dimension 30.5: ±0.5 was ±1!
Rev.	Date	PM	Drawn	Appr.	Description


INFORMATION CONTAINED IN THIS DOCUMENT MAY BE SUBJECT TO EXPORT CONTROL REGULATIONS OF THE EUROPEAN UNION, USA OR OTHER COUNTRIES. EACH RECIPIENT OF THIS DOCUMENT IS RESPONSIBLE FOR ENSURING THAT TRANSFER OR USE OF ANY INFORMATION CONTAINED IN THIS DOCUMENT COMPLIES WITH ALL RELEVANT EXPORT CONTROL REGULATIONS. ECN NO. N/A
THIS DRAWING AND/OR ITS DESIGN IS PROPRIETARY AND THE PROPERTY OF MEGGITT SA. THIS DRAWING AND/OR ITS DESIGN IS PROVIDED TO YOU SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY, IT SHALL NOT BE USED TO FURNISH ANY INFORMATION FOR THE MAKING OF DRAWINGS, PRINTS OR APPARATUS, OR PARTS THEREFORE, EXCEPT WHERE OTHERWISE EXPRESSLY PROVIDED FOR BY CONTRACT WITH MEGGITT SA.
© MEGGITT SA 2015. ALL RIGHTS RESERVED. NO PART OF THIS PUBLICATION MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPIED OR IN ANY OTHER MANNER WITHOUT THE PRIOR WRITTEN PERMISSION OF MEGGITT SA.

MFR S3960	MSS-CAD			MEGGITT	
Scale 1:1	Format A3			Meggitt SA Rte de Moncor 4, CH-1752 Villars-sur-Glâne, Switzerland	

Material: INCONEL 600 / STAINLESS STEEL										Repl.by:					Repl.for:																																	
1	Linear Tolerances [mm]								Radius / Chamfers [mm]			Tol. on angle [°] 				Drawn	06.03.2015	A.Schafer																														
	<table><tr><td>>0,5</td><td>>3</td><td>>6</td><td>>30</td><td>>120</td><td>>400</td><td>>1000</td><td>>2000</td></tr><tr><td>...3</td><td>...6</td><td>...30</td><td>...120</td><td>...400</td><td>...1000</td><td>...2000</td><td>...4000</td></tr></table>								>0,5	>3	>6	>30	>120	>400	>1000	>2000	...3	...6	...30	...120	...400	...1000	...2000	...4000	<table><tr><td>>0,5</td><td>>3</td><td>>6</td></tr><tr><td>...3</td><td>...6</td><td>...</td></tr></table>			>0,5	>3	>6	...3	...6	...	<table><tr><td>...10</td><td>>10</td><td>>50</td><td>>120</td></tr><tr><td>...10</td><td>...50</td><td>...120</td><td>...400</td></tr></table>				...10	>10	>50	>120	...10	...50	...120	...400	Checked	10.03.2015	C.Roulin
	>0,5	>3	>6	>30	>120	>400	>1000	>2000																																								
	...3	...6	...30	...120	...400	...1000	...2000	...4000																																								
>0,5	>3	>6																																														
...3	...6	...																																														
...10	>10	>50	>120																																													
...10	...50	...120	...400																																													
<table><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr></table>								-	-	-	-	-	-	-	-	<table><tr><td>-</td><td>-</td><td>-</td></tr></table>			-	-	-	<table><tr><td>-</td><td>-</td><td>-</td></tr></table>				-	-	-	Appr.	10.03.2015	F.Micco																	
-	-	-	-	-	-	-	-																																									
-	-	-																																														
-	-	-																																														

Accelerometer Type CE 134		DWG.N°	
PNR 444-134-000-705		444-134-000 D 705	

WIRING DIAGRAM

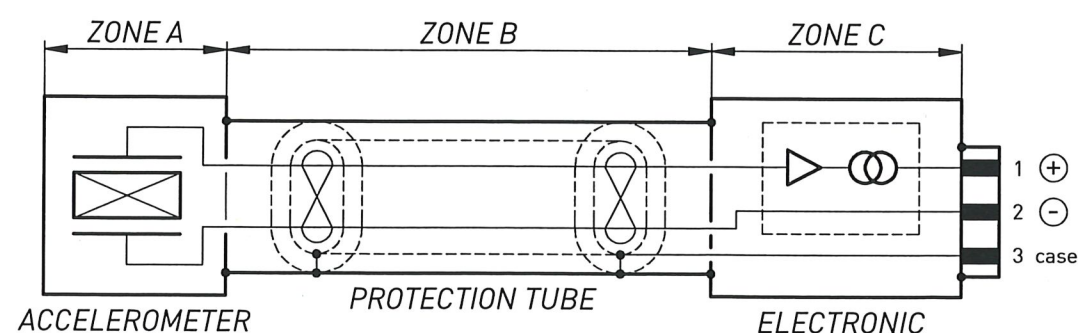TEMPERATURE:
ZONE A: -55°C to +350°C
ZONE B: -55°C to +260°C
ZONE C: -40°C to +125°CNOTE:
PINS 2 AND 3 TO BE
CONNECTED TOGETHER
EXTERNALLY