



RoHS
DIRECTIVE 2011/65/UE

20.10.15 *Micco*

NO MODIFICATION ALLOWED
WITHOUT PRIOR AUTHORIZATION
OF MANAGER

SENSITIVITY: 5µA/g ±5%

2	20.10.15	15420	A. Schafer		Marking: Addition of MEGGITT SA and CSA-Certification.
1	08.04.15	15167	A. Schafer	C. Roulin	Temperature: Zone A and B: -55°C to +350°C, Zone C: -40°C to +125°C was -54°C to +100°C; Dimensions 30: ± 0.2 was ± 0.5; Dimension 30.5: ± 0.5 was ± 1 !
Rev.	Date	PM	Drawn	Appr.	Description

INFORMATION CONTAINED IN THIS DOCUMENT MAY BE SUBJECT TO EXPORT CONTROL REGULATIONS OF THE EUROPEAN UNION, USA OR OTHER COUNTRIES. EACH RECIPIENT OF THIS DOCUMENT IS RESPONSIBLE FOR ENSURING THAT TRANSFER OR USE OF ANY INFORMATION CONTAINED IN THIS DOCUMENT COMPLIES WITH ALL RELEVANT EXPORT CONTROL REGULATIONS. ECN NO. N/A
THIS DRAWING AND/OR ITS DESIGN IS PROPRIETARY AND THE PROPERTY OF MEGGITT SA. THIS DRAWING AND/OR ITS DESIGN IS PROVIDED TO YOU SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY. IT SHALL NOT BE USED TO FURNISH ANY INFORMATION FOR THE MAKING OF DRAWINGS, PRINTS OR APPARATUS, OR PARTS THEREOF, EXCEPT WHERE OTHERWISE EXPRESSLY PROVIDED FOR BY CONTRACT WITH MEGGITT SA.
© MEGGITT SA 2015. ALL RIGHTS RESERVED. NO PART OF THIS PUBLICATION MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPIED OR IN ANY OTHER MANNER WITHOUT THE PRIOR WRITTEN PERMISSION OF MEGGITT SA.

MFR
S3960

MSS-CAD

Scale
1:1

Format
A3

Material: INCONEL 600 / STAINLESS STEEL

Repl.by:

Repl.for:

Linear Tolerances [mm]	Radius / Chamfers (mm)	Tol. on angle [°]
> 0,5 ... 3	> 0,5 ... 3	> 10 ... 10
> 3 ... 6	> 3 ... 6	> 50 ... 120
> 6 ... 30	> 6 ... 30	> 120 ... 400
> 30 ... 120	> 30 ... 120	
> 120 ... 400	> 120 ... 400	
> 400 ... 1000	> 400 ... 1000	
> 1000 ... 2000	> 1000 ... 2000	
> 2000 ... 4000	> 2000 ... 4000	

Accelerometer Type CE 134

PNR 444-134-000-715

MEGGITT

Meggitt SA
Rte de Moncor 4, CH-1752 Villars-sur-Glâne, Switzerland





Drawn
06.03.2015
A.Schafer

Checked
10.03.2015
C.Roulin


Appr.
10.03.2015
F.Micco

DWG.N°
444-134-000 D 715

DIRECTION OF ACCELERATION
TO PROVIDE A POSITIVE SIGNAL

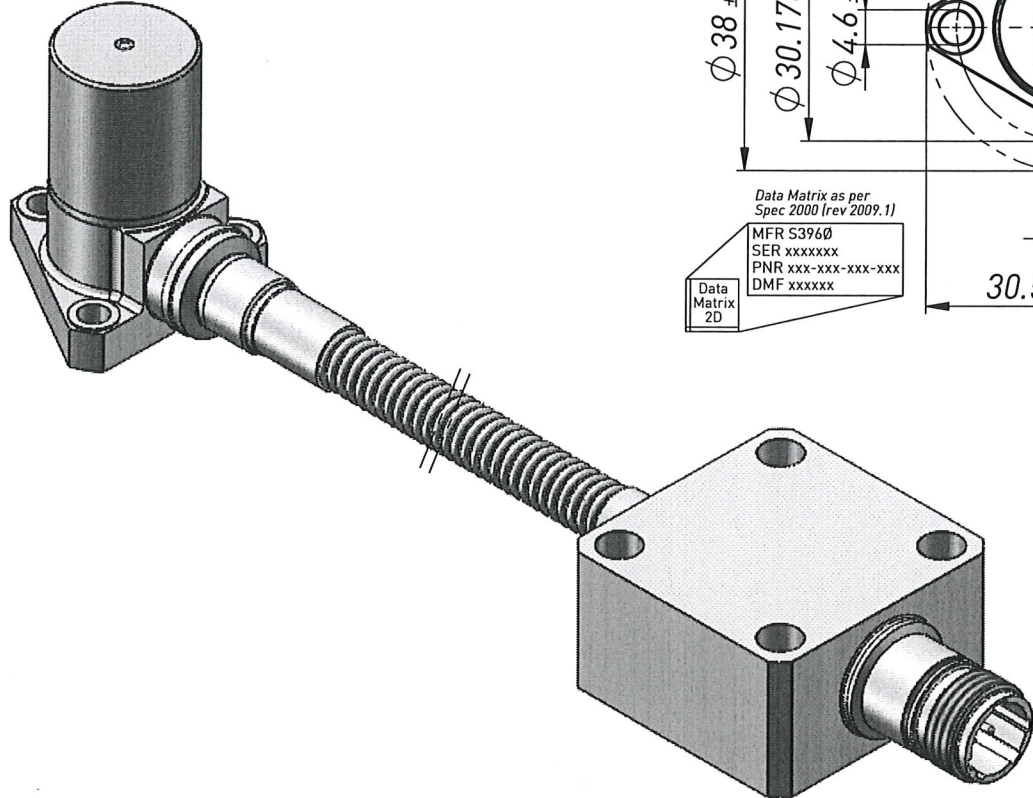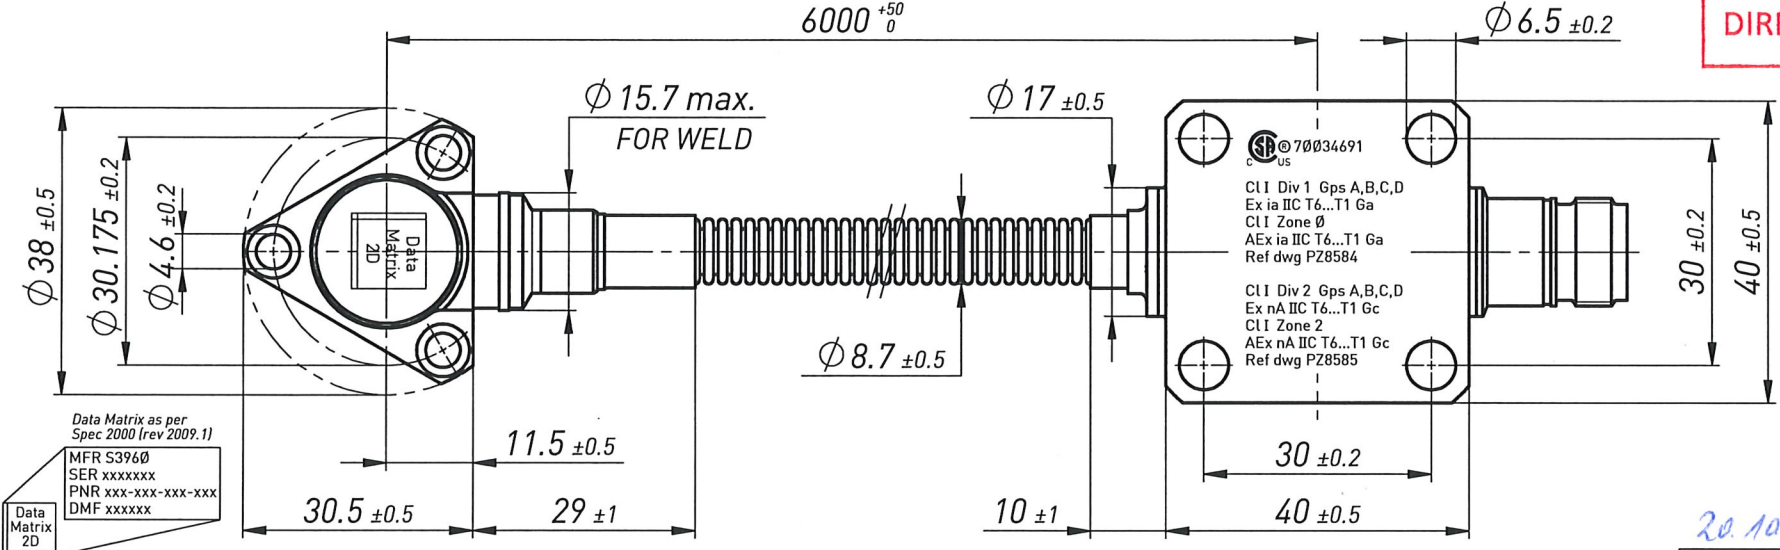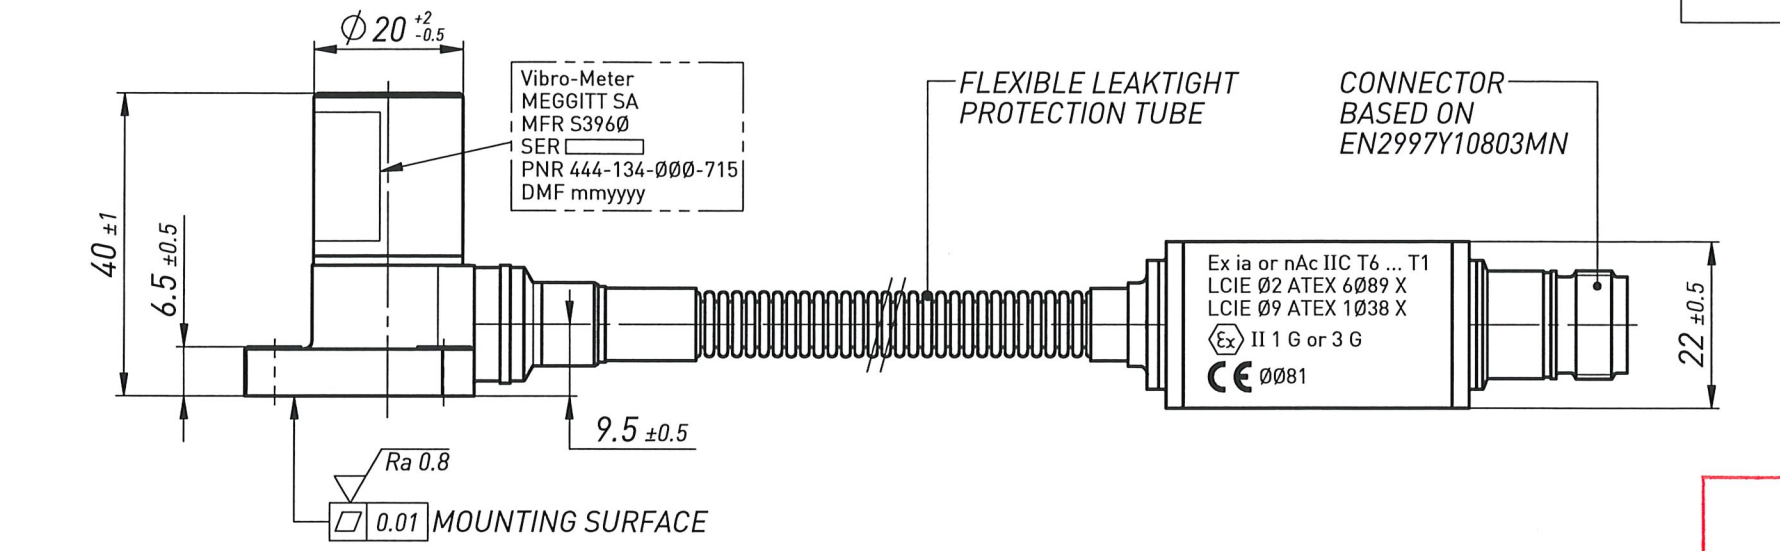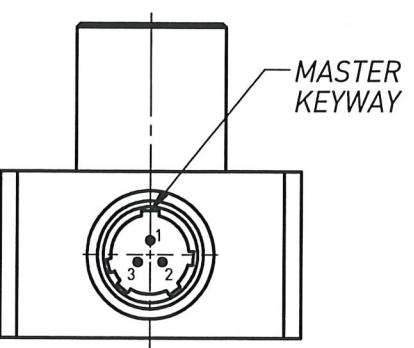

WIRING DIAGRAM

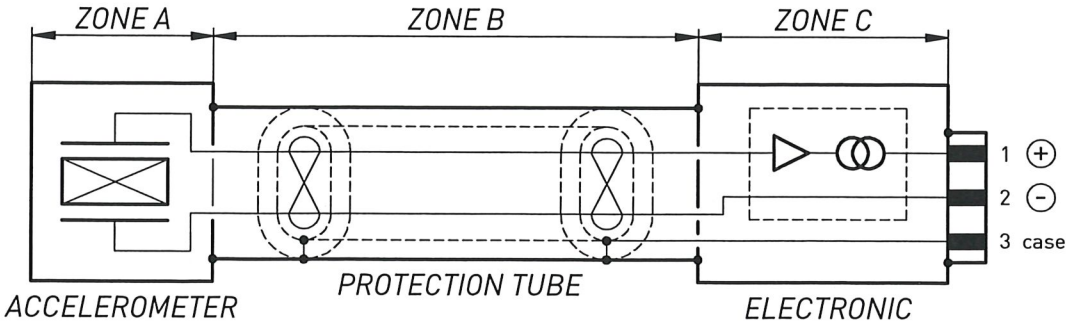

TEMPERATURE:
ZONE A: -55°C to +350°C
ZONE B: -55°C to +260°C
ZONE C: -40°C to +125°C

NOTE:
PINS 2 AND 3 TO BE
CONNECTED TOGETHER
EXTERNALLY